(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 28 August 2003 (28.08.2003)

PCT

(10) International Publication Number WO 03/071077 A1

(51) International Patent Classification7: H02G 3/00

E06B 1/12,

(21) International Application Number:

PCT/IB02/05667

(22) International Filing Date:

30 December 2002 (30.12.2002)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

BO2002A000087


21 February 2002 (21.02.2002)

(71) Applicant (for all designated States except US): G. E. RAPPRESENTANZE DI EMILIANI FAUSTO [IT/IT]; Via Gazzani, 8/2, I-40012 Calderara di Reno (IT).

- (72) Inventor; and
- (75) Inventor/Applicant (for US only): FAUSTO, Emiliani [IT/IT]; Via Paganini, 2, I-40026 Imola (IT).
- (74) Agent: AGAZZANI, Giampaolo: Agazzani & Associati S.r.l., Via dell'Angelo Custode, 11/6, I-40141 Bologna (IT).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW).

[Continued on next page]

(54) Title: WALL DEVICE FOR FITTINGS

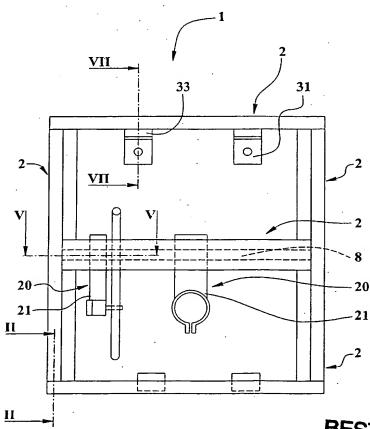

(57) Abstract: A wall device for fittings includes: a plurality of horizontal and vertical uprights (2), mutually coupled by at least first adjustable fixing means (10); connection means (20) for joining the fittings. The uprights (2) include at least a first channel section (5) and a second channel section (6), each including, starting from a respective bottom side (50), two respective opposed side parts (51) nearly orthogonal to the bottom side (50); two respective first portions (52), parallel to the bottom side (50). Said sides, parts and portions (50, 51, 52) of the at least first (5) and second (6) channel sections define respective cavity (55) and longitudinal openings (8) for the first fixing means (10) and for the connection means (20). At least a first portion (52) of each first channel section (5) has also a second portion (53) orthogonal to the first portions (52) and facing outwards of the respective cavity (55).

WO 03/071077 A1

BEST AVAILABLE COPY